




4 SEAT RZR BAJA SPEC ROOF RACK KIT

IMPORTANT: Thank you for purchasing this Cagewrx product. Please read through this entire document before proceeding with installation. If you are not confident in your mechanical skills, please seek the help of a professional to perform the installation. Check your packages immediately upon arrival to ensure that everything listed is included, and to check for damage during shipping. If anything is missing or damaged, or if you need technical assistance with any aspect of this installation, call Cagewrx at (951) 223-9118 as soon as possible. This document last updated Nov. 2023.

APPLICATIONS

These Installation Instructions apply to the following Cagewrx products:

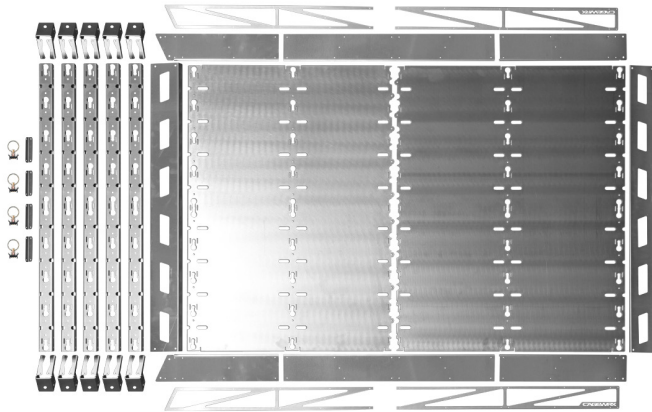

4SXPFT-RR-DIY 4 Seat RZR XP1K "Baja Spec" Roof Rack KIT
4SPRORFT-RR-DIY 4 Seat RZR Pro "Baja Spec" Roof Rack KIT

PARTS LIST

Please check your packages immediately upon arrival to ensure that everything listed is included, and to check for damage during shipping. If anything is missing or damaged, call Cagewrx at (951) 223-9118 .

1. Front Platform
2. Rear Platform
3. Front Visor
4. Rear Visor
5. (5) Cross Supports
6. (10) Steel Adapters
7. (4) Steel Corner Gussets
8. (4) L Track Tie Down Rings
9. (2) Rear Side Plates
10. (2) Middle Side Plates
11. (2) Front Side Plates
12. DRV Side Rear Bezel
13. DRV Side Front Bezel
14. PASS Side Rear Bezel
15. PASS Side Front Bezel
16. (66) 1/8" Rivets
17. (104) 3/16" Rivets

TOOLS NEEDED

- 5/32" Hex Key
- Small Magnet Recommended
- Rivet Gun (Pneumatic Recommended)

SCAN THE QR CODE BELOW





INSTALLATION PROCEDURE


1. Begin by laying out all of the pieces to ensure that you have everything ready to go.






2. Install the Steel Adapters to the ends of the Cross Supports and line up the holes to rivet them together. Using the supplied 3/16" rivets, make sure the rivets are completely through the holes and use your rivet gun to secure the adapters to the cross supports.

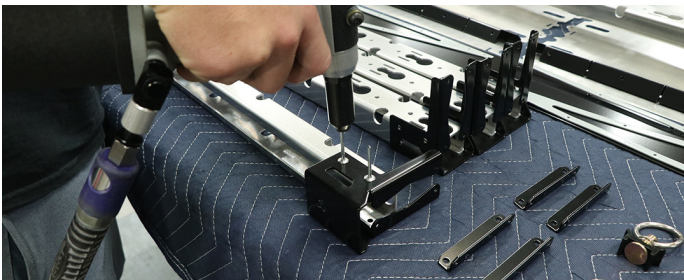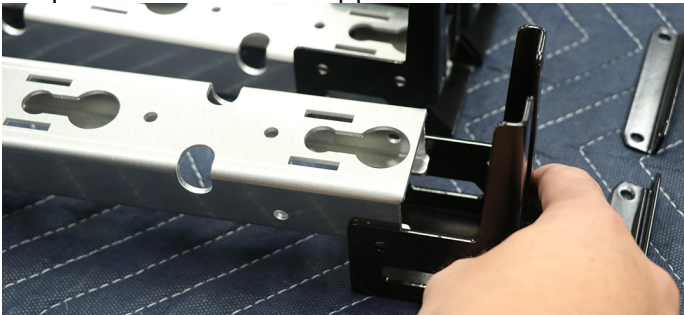




3. Your 5 Assembled Cross Supports should look just like the image below.

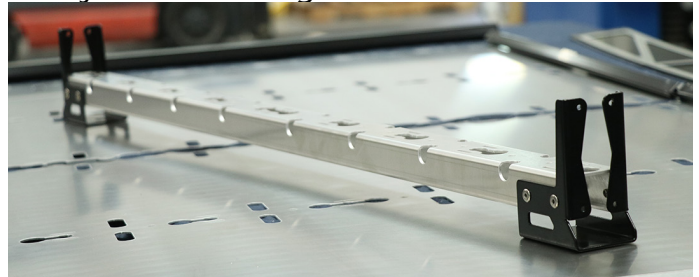


4. Lay out all Cross Supports in the approximate locations to set the platforms in place. The platforms will slide down into the Steel Adapters on each end. Set both platforms in place.

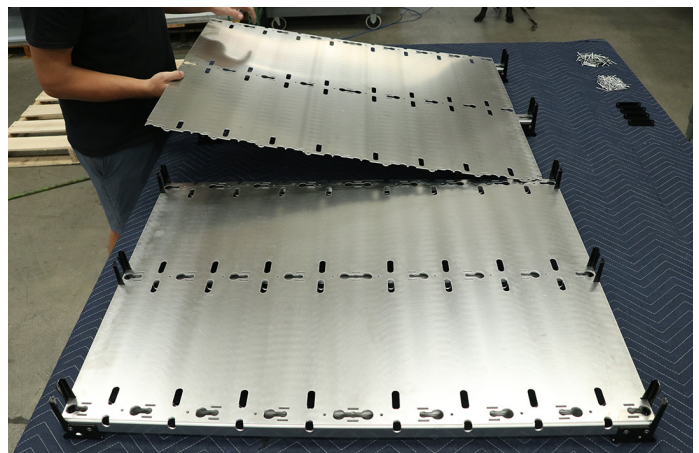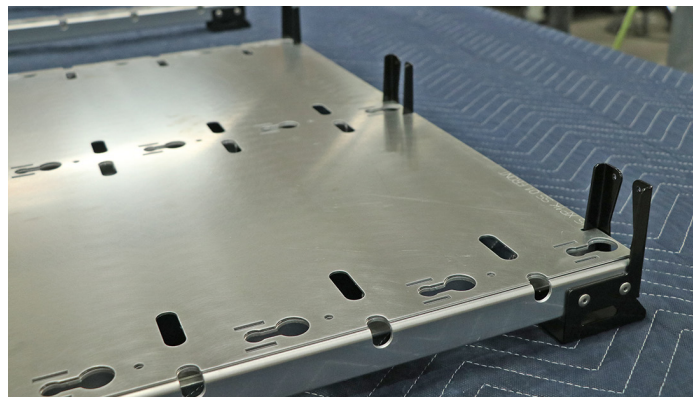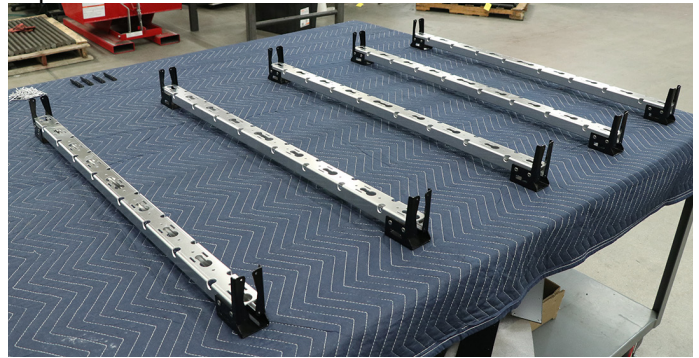

5. Rivet the Platforms to the Cross Supports by first inserting the supplied 3/16" rivets into the 3/16" holes in the platforms. Once all rivets are in place, use your rivet gun to secure each and every rivet that will attach the platforms to the cross supports.

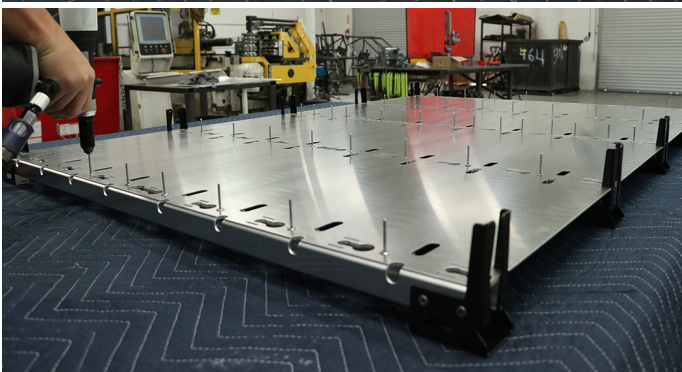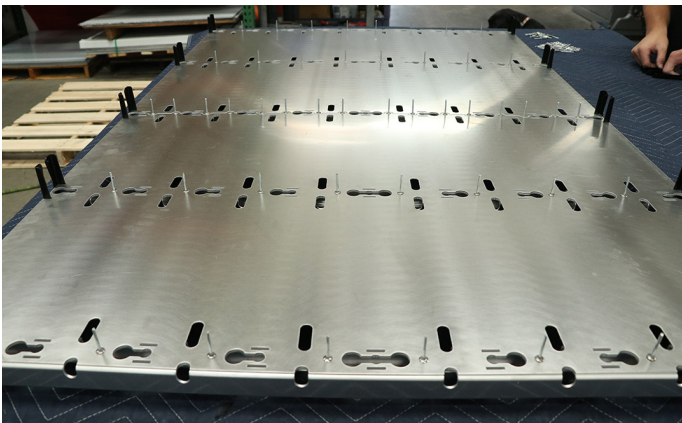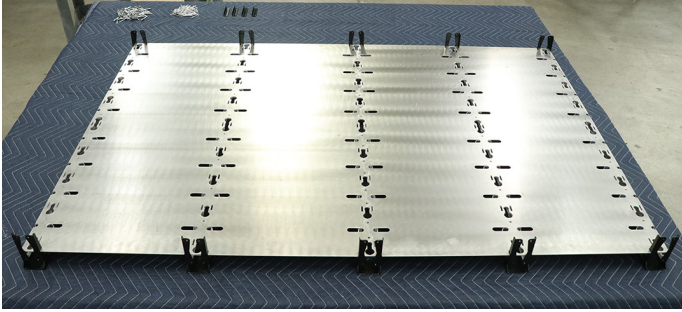



6. Place the Corner Gussets on each end of the Front Visor and use the supplied 3/16" rivets to rivet them into place as pictured below.

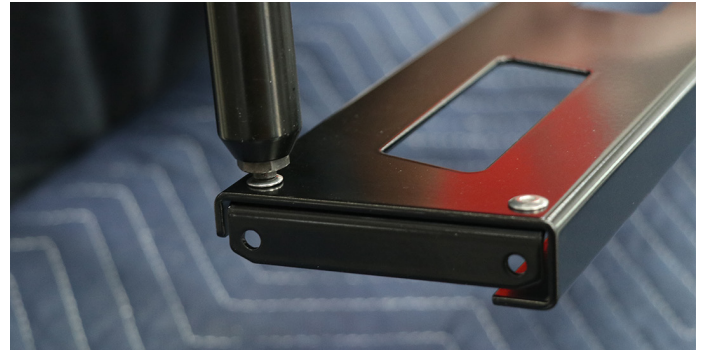

7. Place the Driver Side Bezel on the (3) Driver Side Plates making sure that they are lined up correctly. Start placing the supplied 1/8" rivets into the bottom half of the Bezel only in the holes circled below. DO NOT RIVET INTO ANY OTHER HOLES YET as those will be needed for a later step.




8. Place the Assembled Driver Side Plate on the Driver Side Adapters so the rivet holes are close to being lined up. Start by inserting the (4) rivets through the rear holes into the Steel Adapter. Rivet the (4) rear rivets making sure the side plate is pressed firmly against the Steel Adapter. Continue either forward or back lining up the 4 holes for each Steel Adapter until all rivets are in place and secured. You may need to slightly press up or down on the side plate to get it to line up.

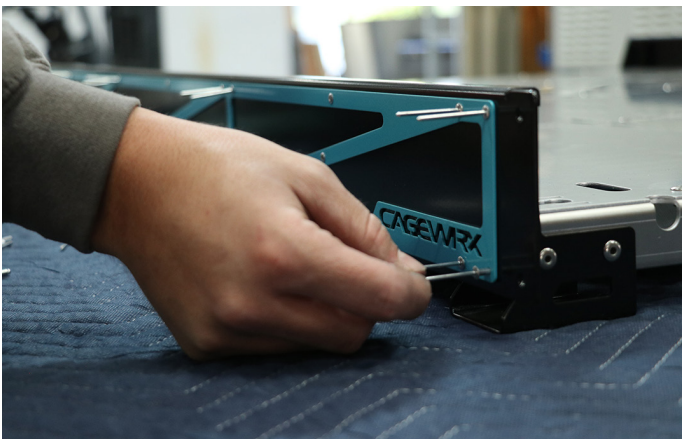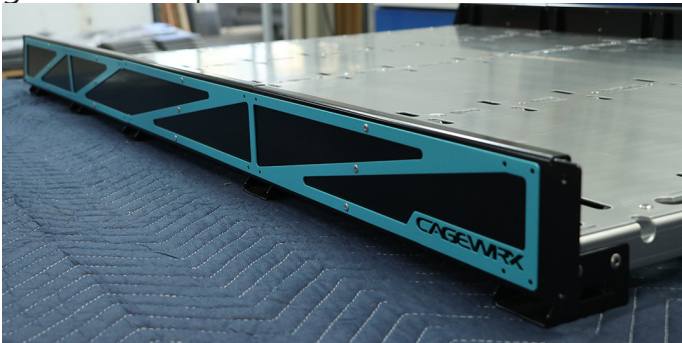


9. REPEAT THIS PROCESS to assemble the Passenger Side Plate.

10. Secure the Front Visor to the Assembled Side Plates using the supplied 3/16" rivets on both ends.

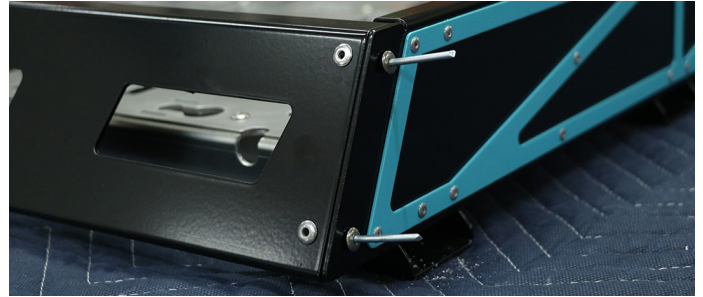


11. Secure the Rear Visor to the Assembled Side Plates using the supplied 3/16" rivets on both ends.

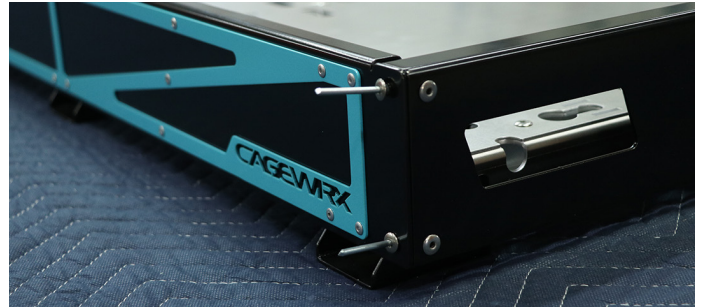

12. Remove your factory DZUS fasteners from your roof panels and place the roof rack on top of your roof. Use a magnet to place the DZUS Fasteners in place as they can be hard to set in place by hand. Once in place, use a 5/32" Hex Key T-Handle to tighten the DZUS Fastener.



13. To install the L Track Rings, start by pressing down on the top of the gold shaft with two fingers on under each side of the black body. You can then insert the bottom into the larger hole and slide it over into the smaller hole and 2 slots as pictured below.

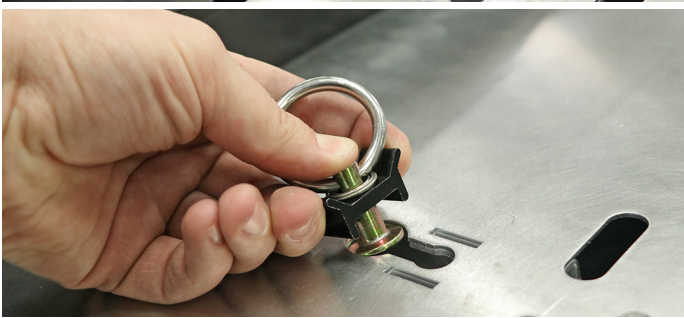

14. ENJOY YOUR ROOF RACK! Be sure to tag us in your photos on social media for a chance to be featured on our page!

